
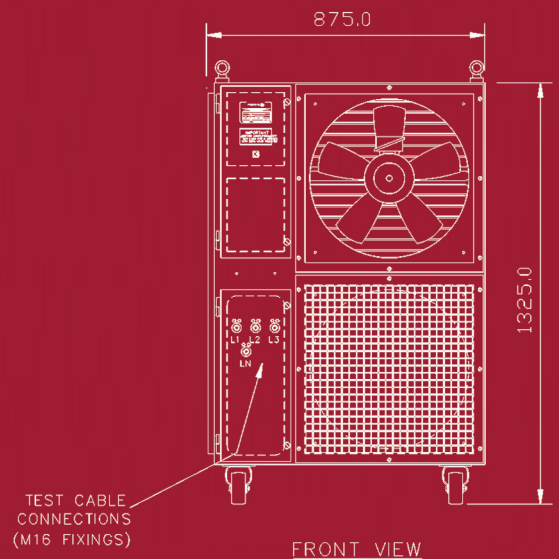


## Datasheet: 150 - 200kW Loadbank Range

Description					
Model		Transportable		Fixed	
Country of Origin		United Kingdom			
Max Capacity - Packaged Loadbank		150kW - 200kW			
Voltage Max - Continuous Operation		380V - 415V			
Operating Frequency Range		50Hz			
Phases		3ph			
Wires (Star Connection)		4			
Load-Step Resolution @ Design Voltage		1kW			
Voltage Tolerance (Short Term Operation)		+5%			
Load Element Tolerance		+/-5%			
Elements		80/20 nickel chrome resistance wire			
Insulation Test		500V			
Auxiliary Supply Voltage		220V - 240V		380V - 415V	
Operating Frequency Range		50Hz		50Hz	
Phases		1ph		3ph	
Load Connections		M16 Copper Busbars			
Protection		Thermal Emergency Cut Out			
		Fan Overload			
		Emergency Stop			
Control Voltage		Selectable - Test or Auxiliary			
Cooling Method		Forced Air Cooling (Horizontal)			
Air-Flow (Approx.)		170m³/min			
Load Switching Category		AC-1 Resistive			
Load Switching Contactor Type		3 Pole AC Contactors			
Rated Maximum Ambient Temperature Operation		+40°C / +104°F			
Rated Minimum Ambient Temperature Operation		-20°C / -4°F			
Rated Maximum Relative Humidity		95% RH			
Altitude Rating		<500m [m.a.s.l.]			
Enclosure		Sheet Steel			
Finish		White - RAL9016			
Control Chamber IP Rating		IP55			
Lifting		Lifting Eyes x2			
Enclosure Dimensions		Castors	Channels	FLB	Fixed *
Length (Approx.)	mm	893	893	893	1048
Width (Approx.)	mm	875	875	875	875
Height (Approx.)	mm	1325	1276	1330	1276
Total Weight (Approx.)	kg	240	250	330	255
Loadbank Control Systems					
Control		KCS		MCS	
		KCS100H - 10m Lead		PC Software or HHT	
Optional Extras:		VIP - Power Meter		Modbus	
		KCS100L (Local)			
		KCS100R (Remote)			
		Extendable System		Extend - Standard	
Load Connection Type		1-Phase and/or Delta			
Frequency / Connections		60Hz and 3-Wire Connection			
Control Extension Cables		50m or 100m Extension			
Transportation		2-Wheel Trailer Mounted			
Load Connections		Powerlocks			
Protection Cover		Loadbank PVC Cover			
Frame		Crash Pack			

\* Permanent installation only



150kW - 200kW AC - Issue 1 - 03/02/15 (Changes to specification may vary without notice)

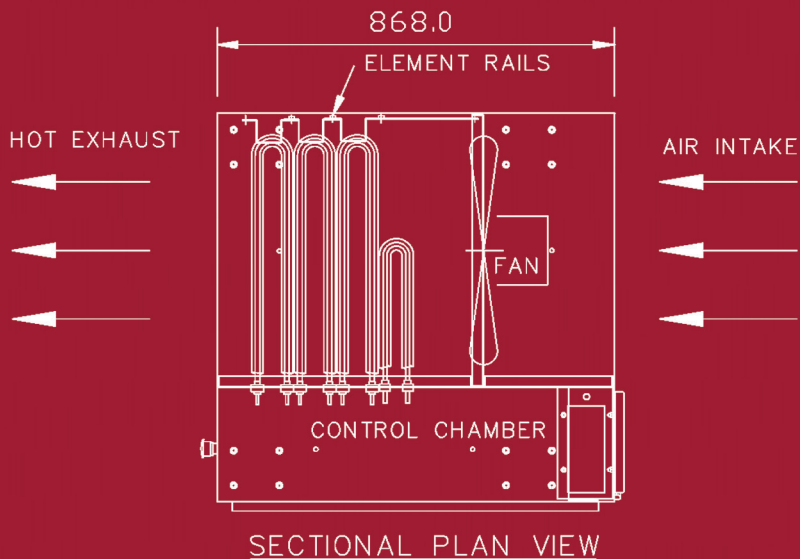

## Quality without compromise

Our loadbanks are characterised by one thing above all: quality. At every stage of our supply chain, from raw material to finished item, we work with established, worldclass suppliers and implement our own uncompromising quality control processes to ensure that our products perform better and last longer.

*Note: Loadbank illustrated with rental crash pack option*

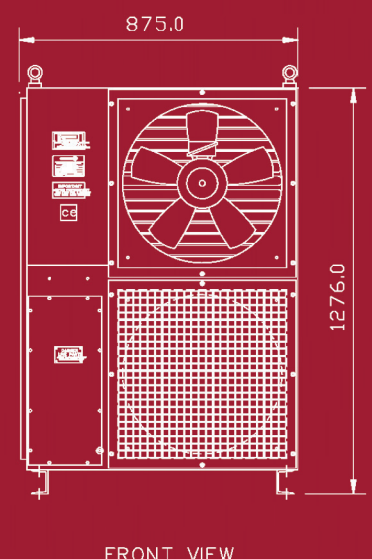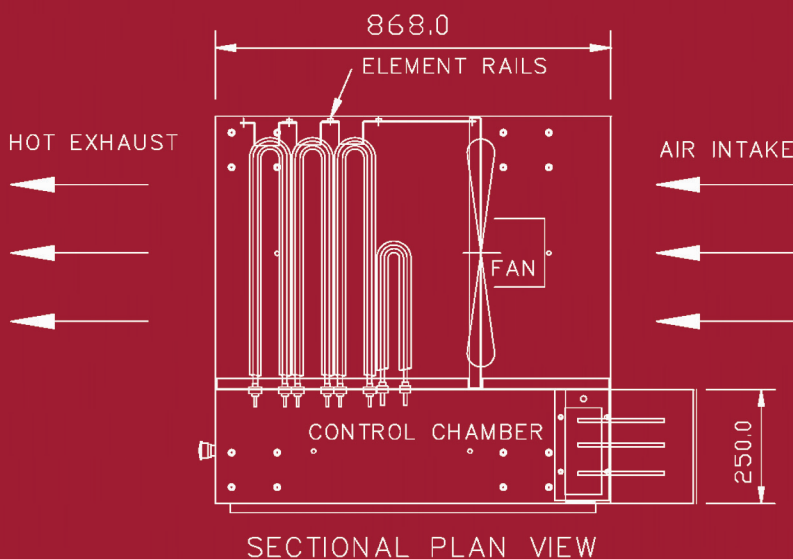

**For further information contact:**  
Crestchic Limited  
Second Avenue, Centrum 100  
Burton-on-Trent, DE14 2WF  
United Kingdom

Tel +44 (0) 1283 531645  
Fax +44 (0) 1283 510103  
sales@crestchic.co.uk  
hires@crestchic.co.uk  
**www.crestchic.co.uk**

The information given in this literature is, to the best of our knowledge, correct at the time of going to print. However, Crestchic is constantly looking at ways of improving their products and services and therefore reserve the right to change, without prior notice, any of the data contained in this publication. Any orders placed will be subject to our Standard Conditions of Sale, available on request. Crestchic is part of the NBI group of companies.

